



COMPACT A&R WINCHES




Highlights

- › Traction and Storage Winches together
- › Space saving specially designed
- › DNV Certified
- › Electrical or hydraulic
- › Heave compensation available

		50 t	150 t	200 t
TRACTION WINCH	t	50	150	200
STORAGE WINCH	t	-	15	18
BRAKING CAPACITY	t	126	200	240
MAX SPEED NO LOAD	m/min	45	33	33
MAX SPEED HALF LOAD	m/min	45	33	33
MAX SPEED FULL LOAD	m/min	30	17	16
WIRE ROPE DIAMETER	mm	38	76	76
MBL	t	140	510	510
STORAGE CAPACITY	m	600	3 320	2 500
MOTOR POWER INSTALLED				
STORAGE*	kW	HYDRAU.	2x100	2x100
TRACTION	kW	HYDRAU.	4x240	4x280
OVERALL DIMENSIONS				
LENGHT	mm	2 300	6 900	8 500
WIDE	mm	2 000	6 600	6 700
HEIGHT	mm	1 800	6 300	6 300
WEIGHT	t	15	200	183
DIRECT SPOOLING		N	Y	Y
AUTOMATIC SPOOLING		N	N	N
CONSTANT TENSION		Y	Y	Y

* Spooling motor not included

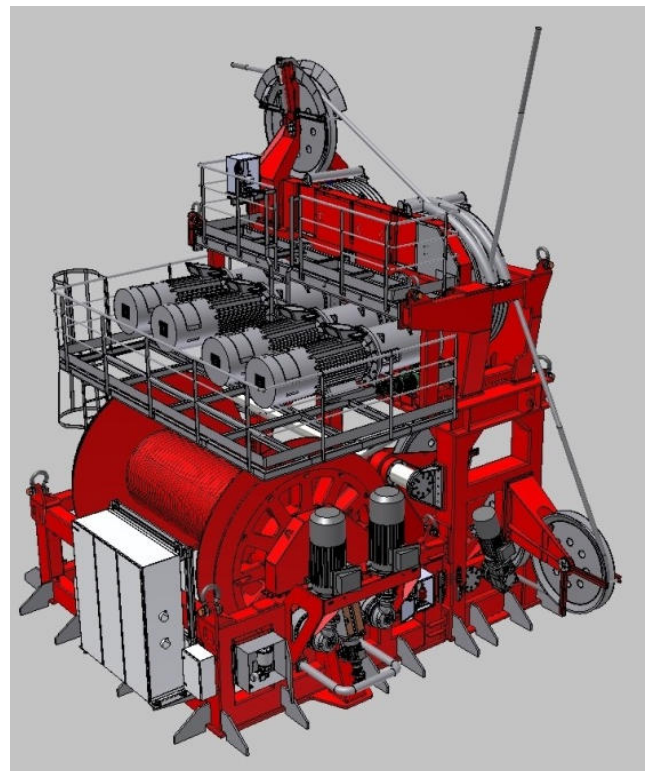

Non contractual data | Contact us for details | REEL © 2016