




WINCHES

TUGGER | INITIATION

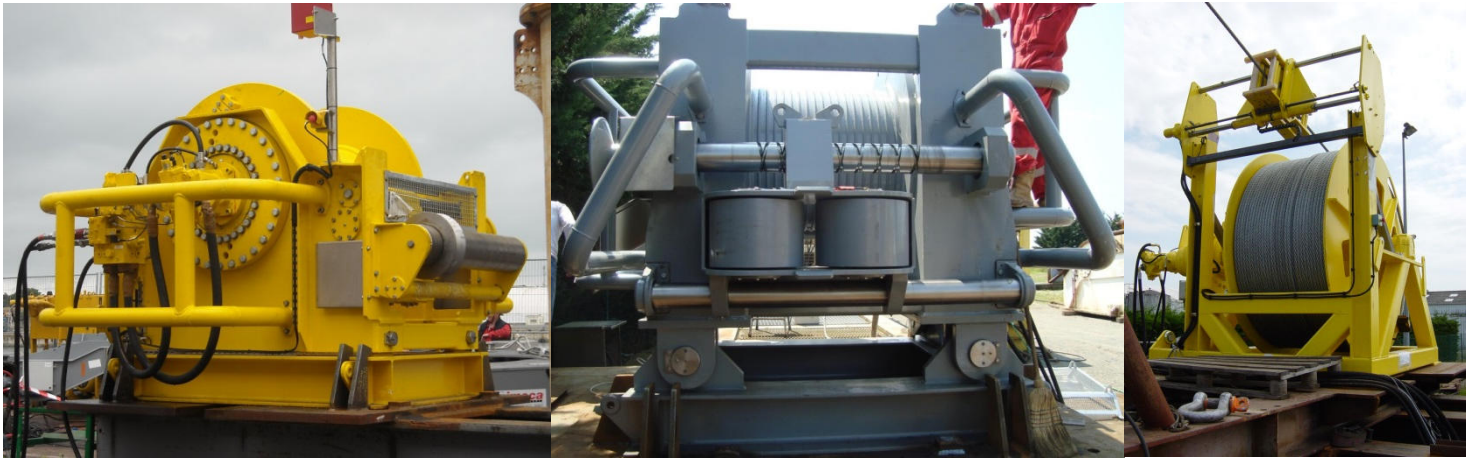

Highlights

- › Electrical or hydraulic
- › Upon request : up to 100 T, DNV certified

| | | 2,5t | 6,5t | 10t | 10t | 20t | 30t | 30t | 40t | 50t |
|-----------------------|-------|--------|--------|--------|---------|---------|------------|------------|------------|------------|
| DUTY | | TUGGER | TUGGER | TUGGER | TUGGER | TUGGER | INITIATION | INITIATION | INITIATION | INITIATION |
| TRACTION | t | 2,5 | 6,5 | 10 | 10 | 20 | 30 | 30 | 40 | 50 |
| BRAKING CAPACITY | t | 4,4 | 11,7 | 18 | 15 | 26,4 | 41 | 41 | 54 | 66 |
| MAX SPEED NO LOAD | m/min | 10 | 10 | 10 | 30 | 16 | 20 | 20 | 32 | 40 |
| MAX SPEED HALF LOAD | m/min | 10 | 10 | 10 | 30 | 16 | 20 | 20 | 32 @ 20 | 40 @ 25 |
| MAX SPEED FULL LOAD | m/min | 10 | 10 | 10 | 30 | 16 | 20 | 20 | 16 | 20 |
| WIRE ROPE DIAMETER | mm | 12 | 18 | 22 | 26 | 32 | 40 | 40 | 44 | 44 |
| MBL | t | 10 | 20 | 40 | 59 | 89 | 137 | 137 | 165 | 165 |
| STORAGE CAPACITY | m | 70 | 85 | 240 | 150 | 250 | 300 | 300 | 350 | 200 |
| MOTOR POWER INSTALLED | KW | 5,5 | 15 | 22 | HYDRAU. | HYDRAU. | HYDRAU. | HYDRAU. | HYDRAU. | HYDRAU. |
| OVERALL DIMENSIONS | | | | | | | | | | |
| LENGHT | mm | 1 000 | 1 300 | 2 000 | 1 400 | 2 500 | 2 700 | 2 700 | 3 300 | 3 200 |
| WIDE | mm | 900 | 1 200 | 1 300 | 1 000 | 2 100 | 2 500 | 2 500 | 2 500 | 2 900 |
| HEIGHT | mm | 1 200 | 1 400 | 2 300 | 1 300 | 1 700 | 2 200 | 2 200 | 2 600 | 2 500 |
| WEIGHT | t | 0,4 | 1,0 | 2,0 | 2,2 | 5,6 | 7,9 | 7,9 | 13,0 | 11,1 |
| DIRECT SPOOLING | | N | N | N | Y | Y | Y | Y | N | N |
| AUTOMATIC SPOOLING | | N | N | N | N | N | N | N | Y | Y |
| CONSTANT TENSION | | N | N | N | N | N | Y | Y | Y | Y |

Non contractual data | Contact us for details | REEL © 2016